

CAP PENDANT PROJECTOR
LED PENDANT



CAP PENDANT SMALL PROJECTOR
LED PENDANT




IP20 | CE | CB | | |

Ceiling rose: Steel / steel wire rope
Body: Die-cast aluminium
Housing: aluminium
Optic: High efficiency Reflector
Weight: 0.50kg
CTN: 30PCS

White Black Silver



| ORDERING CODE | Power (W) | Beam Angle (°) | CCT (K) | Hot Lumen (Lm) | LOR (%) | UGR | On/Off | DRIVER 1-10V | DALI | Triac |
|------------------|-----------|----------------|---------|----------------|---------|-----|--------|--------------|------|-------|
| CAP600-W/B/S-830 | 15 | 20 | 3000 | 1200 | 75% | <19 | ✓ | ✓ | ✓ | ✓ |
| CAP600-W/B/S-840 | | | 4000 | 1240 | | | | | | |
| CAP600-W/B/S-850 | | | 5000 | 1260 | | | | | | |
| CAP601-W/B/S-830 | 15 | 40 | 3000 | 1200 | 75% | <19 | ✓ | ✓ | ✓ | ✓ |
| CAP601-W/B/S-840 | | | 4000 | 1240 | | | | | | |
| CAP601-W/B/S-850 | | | 5000 | 1260 | | | | | | |
| CAP602-W/B/S-830 | 15 | 55 | 3000 | 1200 | 75% | <19 | ✓ | ✓ | ✓ | ✓ |
| CAP602-W/B/S-840 | | | 4000 | 1240 | | | | | | |
| CAP602-W/B/S-850 | | | 5000 | 1260 | | | | | | |



Optical accessories See P.012

| PHILIPS | | | | 3000K | | | |
|---------|-------|-------|------------|-------|-------|-------|------------|
| h(m) | E(lx) | D(mm) | Beam Angle | h(m) | E(lx) | D(mm) | Beam Angle |
| 1.0 | 4036 | 450 | 20° | 1.0 | 2720 | 680 | 40° |
| 2.0 | 1009 | 900 | 30° | 2.0 | 680 | 1360 | 60° |
| 3.0 | 448 | 1350 | 40° | 3.0 | 302 | 2040 | 55° |
| | | | 60° | | | | 60° |
| | | | 30° | | | | 30° |
| | | | 4036 | | | | 1865 |
| | | | 2767 | | | | 760 |
| | | | 1882 | | | | 466 |
| | | | | | | | 1510 |
| | | | | | | | 207 |
| | | | | | | | 2270 |




CAP PENDANT MEDIUM PROJECTOR
LED PENDANT




IP20 CE CB

Ceiling rose: Steel / steel wire rope
Body: Die-cast aluminium
Housing: aluminium
Optic: High efficiency Reflector
Weight: 0.70kg
CTN: 20PCS

White Black Silver



| ORDERING CODE | Power (W) | Beam Angle (°) | CCT (K) | Hot Lumen (Lm) | LOR (%) | UGR | On/Off | DRIVER 1-10V | DALI | Triac |
|------------------|-----------|----------------|---------|----------------|---------|-----|--------|--------------|------|-------|
| CAP800-W/B/S-830 | | | 3000 | 1930 | | | | | | |
| CAP800-W/B/S-840 | 24 | 20 | 4000 | 1950 | 75% | <19 | ✓ | ✓ | ✓ | ✓ |
| CAP800-W/B/S-850 | | | 5000 | 1980 | | | | | | |
| CAP801-W/B/S-830 | | | 3000 | 1636 | | | | | | |
| CAP801-W/B/S-840 | 24 | 40 | 4000 | 1800 | 75% | <19 | ✓ | ✓ | ✓ | ✓ |
| CAP801-W/B/S-850 | | | 5000 | 1816 | | | | | | |
| CAP802-W/B/S-830 | | | 3000 | 1840 | | | | | | |
| CAP802-W/B/S-840 | 24 | 55 | 4000 | 1860 | 75% | <19 | ✓ | ✓ | ✓ | ✓ |
| CAP802-W/B/S-850 | | | 5000 | 1880 | | | | | | |

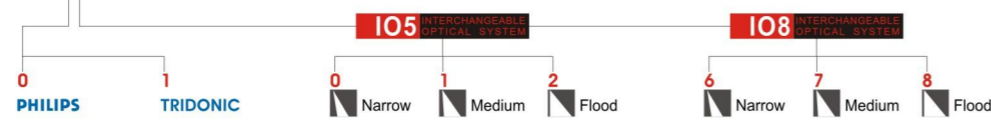

Optical accessories See P.012

| PHILIPS | | | | 3000K | | | |
|---------|-------|-------|------|-------|-------|-------|------|
| h(m) | E(lx) | D(mm) | Beam | h(m) | E(lx) | D(mm) | Beam |
| 1.0 | 7065 | 480 | 20° | 1.0 | 4936 | 700 | 40° |
| 2.0 | 1766 | 950 | | 2.0 | 1234 | 1400 | |
| 3.0 | 785 | 1430 | | 3.0 | 548 | 2100 | |
| | | | 30° | | | | 30° |
| | | | 60° | | | | 60° |
| | | | 55° | | | | 55° |




CAP PENDANT LARGE PROJECTOR
LED PENDANT




IP20 CE CB

Ceiling rose: Steel / steel wire rope
Body: Die-cast aluminium
Housing: aluminium
Optic: High efficiency Reflector
Weight: 0.85kg
CTN: 12PCS

White Black Silver



| ORDERING CODE | Power (W) | Beam Angle (°) | CCT (K) | Hot Lumen (Lm) | LOR (%) | UGR | On/Off | DRIVER 1-10V | DALI | Triac |
|-------------------|-----------|----------------|---------|----------------|---------|-----|--------|--------------|------|-------|
| CAP1000-W/B/S-830 | | | 3000 | 3431 | | | | | | |
| CAP1000-W/B/S-840 | 35 | 20 | 4000 | 3629 | 83% | <19 | ✓ | ✓ | ✓ | ✓ |
| CAP1000-W/B/S-850 | | | 5000 | 3576 | | | | | | |
| CAP1001-W/B/S-830 | | | 3000 | 3392 | | | | | | |
| CAP1001-W/B/S-840 | 35 | 40 | 4000 | 3586 | 83% | <19 | ✓ | ✓ | ✓ | ✓ |
| CAP1001-W/B/S-850 | | | 5000 | 3534 | | | | | | |
| CAP1002-W/B/S-830 | | | 3000 | 3426 | | | | | | |
| CAP1002-W/B/S-840 | 35 | 55 | 4000 | 3492 | 81% | <19 | ✓ | ✓ | ✓ | ✓ |
| CAP1002-W/B/S-850 | | | 5000 | 3544 | | | | | | |

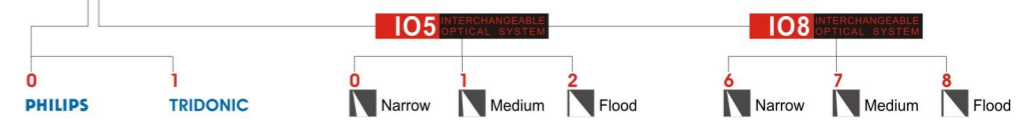

Optical accessories See P.012

| PHILIPS | | | | 3000K | | | |
|---------|-------|-------|------|-------|-------|-------|------|
| h(m) | E(lx) | D(mm) | Beam | h(m) | E(lx) | D(mm) | Beam |
| 1.0 | 11776 | 410 | 20° | 1.0 | 7156 | 680 | 40° |
| 2.0 | 2944 | 810 | | 2.0 | 1789 | 1360 | |
| 3.0 | 1308 | 1220 | | 3.0 | 795 | 2040 | |
| | | | 30° | | | | 30° |
| | | | 60° | | | | 60° |
| | | | 55° | | | | 55° |