



CUBE SURFACE MOUNT SERIES



Product features


The CUBE SURFACE MOUNT Series is able to perform downlight or spot lighting. An multiple application luminaires that offers mixed lighting and beam angles. In this way the fitting blends with the space and has a great feeling of consistency. The high-performance range, consisting of downlights luminaires meets superior standards of visual comfort and efficiency whilst delivering optimal light quality for a multitude of visual tasks.

Range of Application

Commercial
Residential
Architectural
Hospitals
Museum / Art gallery



General lighting
Ambient lighting produced
by wide beam light
distribution.




Downlights
Wide beam, rotationally symmetrical
light distribution
for general lighting

LED
Wattage:16-38W
Lumen:1281-3147lm
Light distribution:
Narrow/Medium/Flood



General lighting
Ambient lighting produced
by wide beam light
distribution.



Downlights
Wide beam, rotationally symmetrical
light distribution
for general lighting

LED
Wattage:2x16-2x38W
Lumen:2x1281-2x3147lm
Light distribution:
Narrow/Medium/Flood



Suitable for indoor use



Protection level is IP20



High efficiency Reflector



Comply with CE certification



The electrical grade is class2



CRI > 80 (standard)
CRI > 90 (optional)




CUBE SURFACE MOUNT SERIES SMALL PROJECTOR
LED SURFACE MOUNT

66x80




IP20 | CE | CB | | |

Body: aluminium
Housing: aluminium
Optic: High efficiency Reflector
Weight: 0.70kg
CTN: 64PCS






White
 Black
 Silver

ORDERING CODE	Power (W)	Beam Angle (°)	CCT (K)	Hot Lumen (Lm)	LOR (%)	UGR	On/Off	DRIVER 1-10V	DALI	Triac
CBS1200-W/B/S-830	15	10	3000	997	79%	<19	✓	✓	✓	✓
CBS1200-W/B/S-840			4000	1050						
CBS1200-W/B/S-850			5000	1128						
CBS1201-W/B/S-830	15	40	3000	902	75%	<19	✓	✓	✓	✓
CBS1201-W/B/S-840			4000	951						
CBS1201-W/B/S-850			5000	995						
CBS1202-W/B/S-830	15	50	3000	882	72%	<19	✓	✓	✓	✓
CBS1202-W/B/S-840			4000	925						
CBS1202-W/B/S-850			5000	975						

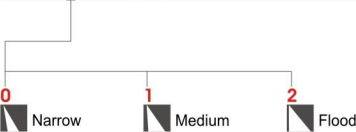

ORSAM CSHPM1.CM-KTLP-A737-1

3000K

	h(m)	E(lx)	D(mm)		h(m)	E(lx)	D(mm)		h(m)	E(lx)	D(mm)
60°			10°	60°			40°	60°			50°
	1.0	5056	380		1.0	2757	660		1.0	1790	940
	2.0	1264	760		2.0	689	1310		2.0	447	1870
30°	3.0	561	1140	30°	3.0	306	1970	30°	3.0	198	2810
5077				2759				1829			




CUBE SURFACE MOUNT SERIES MEDIUM PROJECTOR
LED SURFACE MOUNT

120x150




IP20 | CE | CB | | |

Body: aluminium
Housing: aluminium
Optic: High efficiency Reflector
Weight: 1.2kg
CTN: 16PCS






White
 Black
 Silver

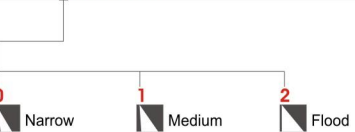ORDERING CODE	Power (W)	Beam Angle (°)	CCT (K)	Hot Lumen (Lm)	LOR (%)	UGR	On/Off	DRIVER 1-10V	DALI	Triac
CBS2100-W/B/S-830	36	10	3000	2457	73%	<19	✓	✓	✓	✓
CBS2100-W/B/S-840			4000	2515						
CBS2100-W/B/S-850			5000	2598						
CBS2101-W/B/S-830	36	40	3000	2668	79%	<19	✓	✓	✓	✓
CBS2101-W/B/S-840			4000	2710						
CBS2101-W/B/S-850			5000	2795						
CBS2102-W/B/S-830	36	50	3000	2415	72%	<19	✓	✓	✓	✓
CBS2102-W/B/S-840			4000	2510						
CBS2102-W/B/S-850			5000	2592						



ORSAM GW PSLR31.CM-KRKT-A737-1

3000K

	h(m)	E(lx)	D(mm)		h(m)	E(lx)	D(mm)		h(m)	E(lx)	D(mm)
30°			10°	60°			40°	60°			50°
	1.0	5056	380		1.0	2757	660		1.0	1790	940
30°	2.0	1264	760	30°	2.0	689	1310	30°	2.0	447	1870
	3.0	561	1140		3.0	306	1970		3.0	198	2810