




EYE WALL MOUNTED SERIES ADJUSTABLE PROJECTOR
LED WALL LIGHT

84X84




IP20 | CE | CB |

Body: Die-cast aluminium
Housing: 1.2mm Steel-matt black paint
Optic: High efficiency Reflector
Weight: 0.52kg
CTN: 24PCS



White Black Silver

ORDERING CODE	Power (W)	Beam Angle (°)	CCT (K)	Hot Lumen (Lm)	LOR (%)	UGR	On/Off	DRIVER 1-10V	DALI	Triac
1EW4000-W/B/S-830	9	15	3000	579	86%	<19	✓	✓	✓	✓
1EW4000-W/B/S-840			4000	595						
1EW4000-W/B/S-850			5000	625						
1EW4001-W/B/S-830	9	20	3000	562	85%	<19	✓	✓	✓	✓
1EW4001-W/B/S-840			4000	588						
1EW4001-W/B/S-850			5000	616						
1EW4002-W/B/S-830	9	30	3000	542	82%	<19	✓	✓	✓	✓
1EW4002-W/B/S-840			4000	581						
1EW4002-W/B/S-850			5000	609						

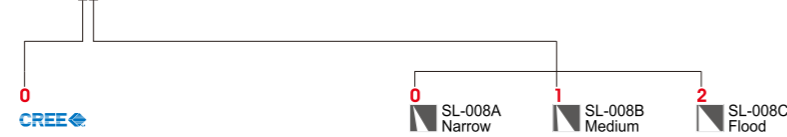

CREE CXA1304

3000K

h(m)	E(lx)	D(mm)	h(m)	E(lx)	D(mm)	h(m)	E(lx)	D(mm)
15°			20°			30°		
1.0	4030	290	1.0	2737	370	1.0	1551	570
2.0	1007	570	2.0	684	740	2.0	387	1140
3.0	447	860	3.0	304	1110	3.0	172	1710


EYE WALL MOUNTED SERIES ADJUSTABLE PROJECTOR
LED WALL LIGHT

154X84




IP20 | CE | CB |

Body: Die-cast aluminium
Housing: 1.2mm Steel-matt black paint
Optic: High efficiency Reflector
Weight: 0.91kg
CTN: 18PCS



White Black Silver

ORDERING CODE	Power (W)	Beam Angle (°)	CCT (K)	Hot Lumen (Lm)	LOR (%)	UGR	On/Off	DRIVER 1-10V	DALI	Triac
2EW4000-W/B/S-830	2x9	15	3000	2x579	86%	<19	✓	✓	✓	✓
2EW4000-W/B/S-840			4000	2x595						
2EW4000-W/B/S-850			5000	2x625						
2EW4001-W/B/S-830	2x9	20	3000	2x562	85%	<19	✓	✓	✓	✓
2EW4001-W/B/S-840			4000	2x588						
2EW4001-W/B/S-850			5000	2x616						
2EW4002-W/B/S-830	2x9	30	3000	2x542	82%	<19	✓	✓	✓	✓
2EW4002-W/B/S-840			4000	2x581						
2EW4002-W/B/S-850			5000	2x609						

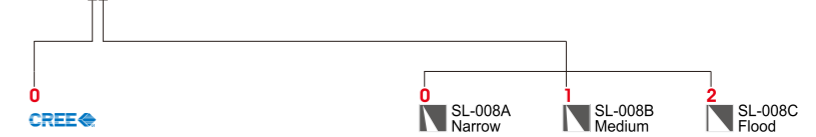

CREE CXA1304

3000K

h(m)	E(lx)	D(mm)	h(m)	E(lx)	D(mm)	h(m)	E(lx)	D(mm)
15°			20°			30°		
1.0	4030	290	1.0	2737	370	1.0	1551	570
2.0	1007	570	2.0	684	740	2.0	387	1140
3.0	447	860	3.0	304	1110	3.0	172	1710




EYE WALL MOUNTED SERIES ADJUSTABLE PROJECTOR
LED WALL LIGHT

225X105




IP20 | CE | CB |

Body: Die-cast aluminium
Housing: 1.2mm Steel-matt black paint
Optic: High efficiency Reflector
Weight: 1.33kg
CTN: 12PCS



White Black Silver

ORDERING CODE	Power (W)	Beam Angle (°)	CCT (K)	Hot Lumen (Lm)	LOR (%)	UGR	On/Off	DRIVER 1-10V	DALI	Triac
3EW4000-W/B/S-830	3x9	15	3000	3x579	86%	<19	✓	✓	✓	✓
3EW4000-W/B/S-840			4000	3x595						
3EW4000-W/B/S-850			5000	3x625						
3EW4001-W/B/S-830	3x9	20	3000	3x562	85%	<19	✓	✓	✓	✓
3EW4001-W/B/S-840			4000	3x588						
3EW4001-W/B/S-850			5000	3x616						
3EW4002-W/B/S-830	3x9	30	3000	3x542	82%	<19	✓	✓	✓	✓
3EW4002-W/B/S-840			4000	3x581						
3EW4002-W/B/S-850			5000	3x609						

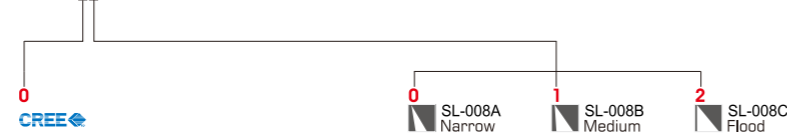

CREE CXA1304

3000K

h(m)	E(lx)	D(mm)	h(m)	E(lx)	D(mm)	h(m)	E(lx)	D(mm)
15°			20°			30°		
1.0	4030	290	1.0	2737	370	1.0	1551	570
2.0	1007	570	2.0	684	740	2.0	387	1140
3.0	447	860	3.0	304	1110	3.0	172	1710

EYE SERIES BED READING PROJECTOR
LED WALL LIGHT


150X40

150X30




IP20 | CE | CB |

Body: Die-cast aluminium
Housing: 1.2mm Steel-matt black paint
Optic: High efficiency Reflector
Weight: 0.30kg
CTN: 45PCS




White Black Silver

ORDERING CODE	Power (W)	Beam Angle (°)	CCT (K)	Hot Lumen (Lm)	LOR (%)	UGR	On/Off	DRIVER 1-10V	DALI	Triac
EB4000-W/B/S-830	6	16	3000	461	86%	<19	✓	✓	✓	✓
EB4000-W/B/S-840			4000	482						
EB4000-W/B/S-850			5000	497						
EB4001-W/B/S-830	6	21	3000	442	83%	<19	✓	✓	✓	✓
EB4001-W/B/S-840			4000	463						
EB4001-W/B/S-850			5000	488						
EB4002-W/B/S-830	6	30	3000	453	85%	<19	✓	✓	✓	✓
EB4002-W/B/S-840			4000	477						
EB4002-W/B/S-850			5000	495						

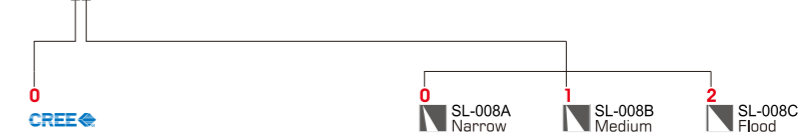

IP20 | CE | CB |

Body: Die-cast aluminium
Housing: 1.2mm Steel-matt black paint
Optic: High efficiency Reflector
Weight: 0.30kg
CTN: 45PCS



White Black Silver

ORDERING CODE	Power (W)	Beam Angle (°)	CCT (K)	Hot Lumen (Lm)	LOR (%)	UGR	On/Off	DRIVER 1-10V	DALI	Triac
ELB2400-W/B/S-830	6	25	3000	320	70%	<19	✓	✓	✓	✓
ELB2400-W/B/S-840			4000	332						
ELB2400-W/B/S-850			5000	346						
ELB2401-W/B/S-830	6	40	3000	350	73%	<19	✓	✓	✓	✓
ELB2401-W/B/S-840			4000	362						
ELB2401-W/B/S-850			5000	376						

