




WALL TUBE SERIES SMALL PROJECTOR
LED WALL LIGHT



WALL TUBE SERIES MEDIUM PROJECTOR
LED WALL LIGHT

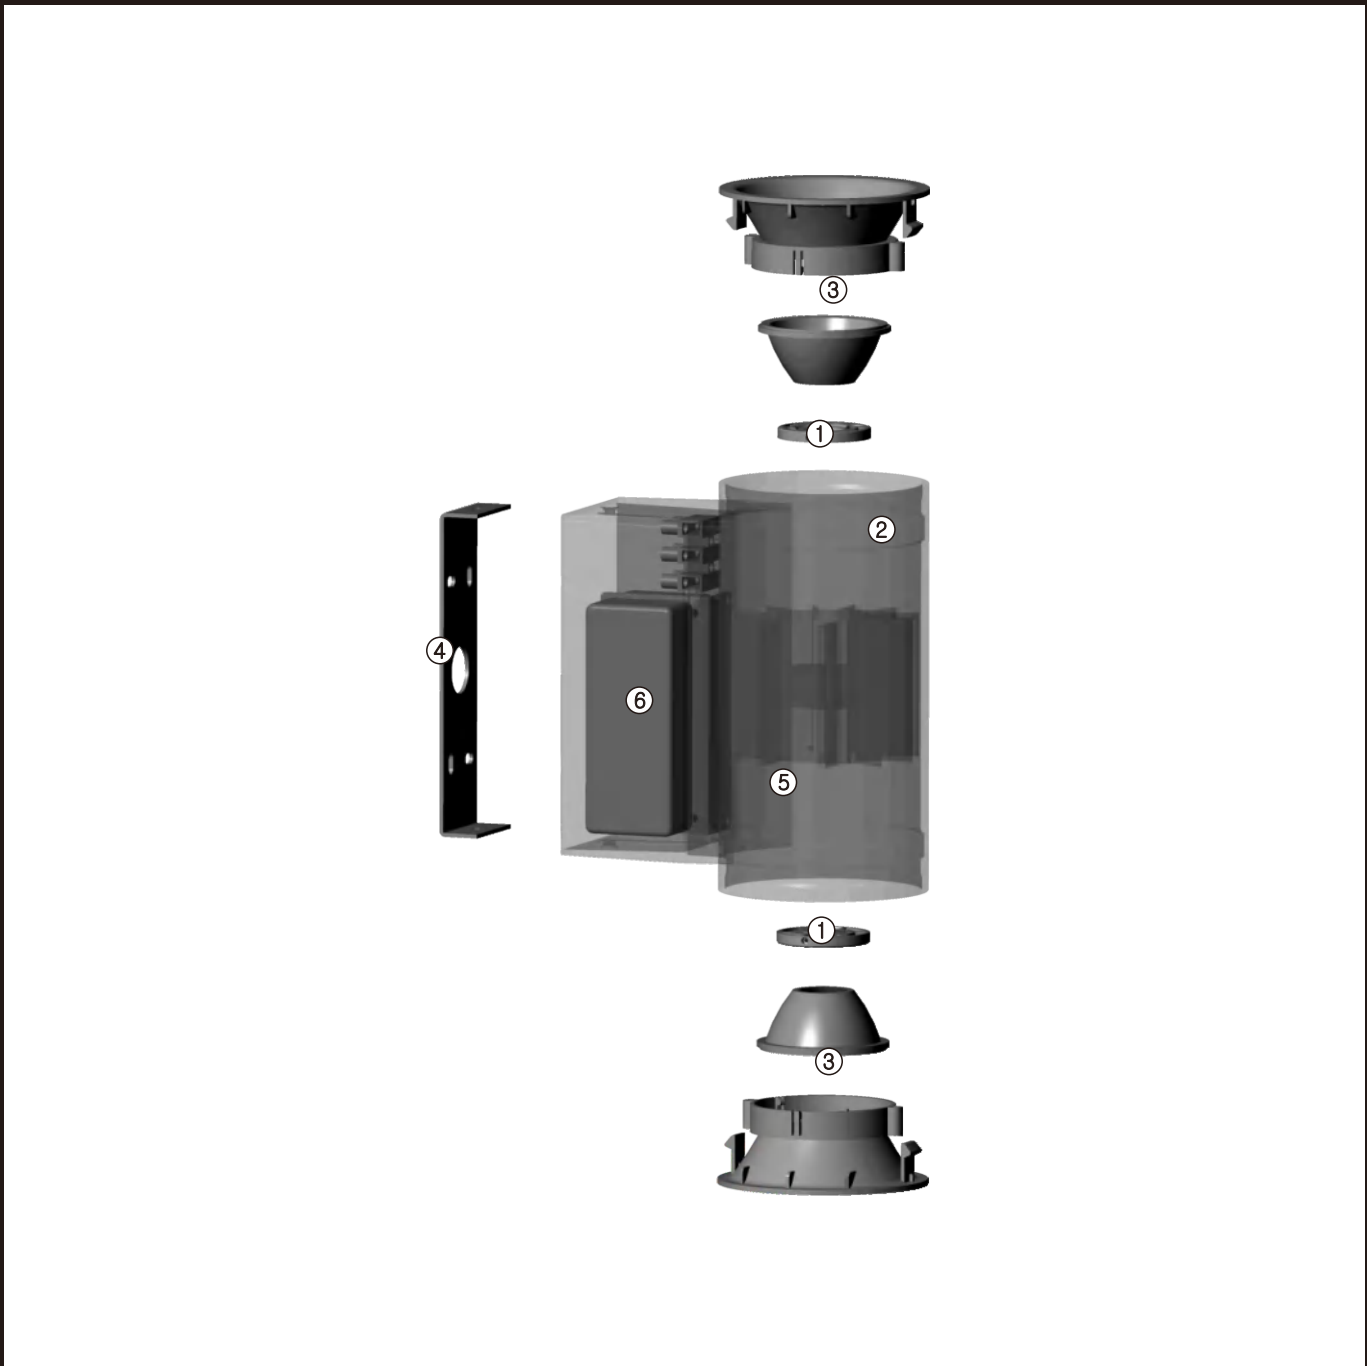

1: LED

High-power Led COB (Chip on board), offering high performance in an easy to use platform.
Light colors: Warm White, Neutral White, Cool White .

2: Housing

Made of die-casting aluminum and designed in support of the heat dissipation function.
The latest heat dissipation housing, with optimized heat dissipation structure, which felicitate the heat exchange quickly from aluminum alloy die-casting housing to the air.

3: Reflector

High efficeincy alum-mirror reflector, without any shadow,high lumen efficiency.

4:Wall installation bracket

Made of 1.2mm galvanized steel that holds by 2 self tapping screws.

5: Structure design

Housing and driver separated, with better heat dissipation, can effectively extend the lifespan for the light.
The fixture security for suspicion locker used.

6: Control gear

Switchable, phase dimmable or DALI dimmable
Phase dimmable version: dimming with external dimmers possible (trailing edge)




WALL TUBE SERIES SMALL PROJECTOR
LED WALL LIGHT

80



IP20 | CE | CB | | |



Body: Die-cast aluminium
Housing: Die-cast aluminium
Optic: High efficiency Reflector
Weight: 0.60kg
CTN: 12PCS



IO5 INTERCHANGABLE OPTICAL SYSTEM See P.012


White Black Silver

ORDERING CODE	Power (W)	Beam Angle (°)	CCT (K)	Hot Lumen (Lm)	LOR (%)	UGR	On/Off	DRIVER 1-10V	DALI	Triac
WTE800-W/B/S-830	2x15	20	3000	2x1252	77%	<19	✓	✓	✓	✓
WTE800-W/B/S-840			4000	2x1362						
WTE800-W/B/S-850			5000	2x1389						
WTE801-W/B/S-830	2x15	40	3000	2x1250	77%	<19	✓	✓	✓	✓
WTE801-W/B/S-840			4000	2x1360						
WTE801-W/B/S-850			5000	2x1380						
WTE802-W/B/S-830	2x15	55	3000	2x1227	76%	<19	✓	✓	✓	✓
WTE802-W/B/S-840			4000	2x1344						
WTE802-W/B/S-850			5000	2x1371						

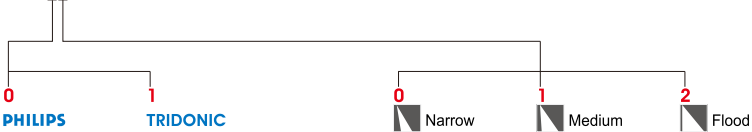

Optical accessories See P.012

PHILIPS SLM C 830 1204 L12 G1 3000K

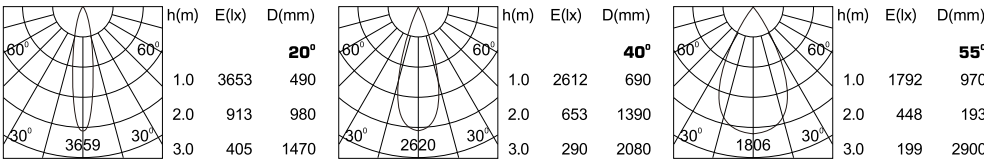


WALL TUBE SERIES MEDIUM PROJECTOR
LED WALL LIGHT

100



IP20 | CE | CB | | |



Body: Die-cast aluminium
Housing: Die-cast aluminium
Optic: High efficiency Reflector
Weight: 0.60kg
CTN: 12PCS



IO5 INTERCHANGABLE OPTICAL SYSTEM See P.012

White Black Silver

ORDERING CODE	Power (W)	Beam Angle (°)	CCT (K)	Hot Lumen (Lm)	LOR (%)	UGR	On/Off	DRIVER 1-10V	DALI	Triac
WTE1000-W/B/S-830	2x22	20	3000	2x1800	80%	<19	✓	✓	✓	✓
WTE1000-W/B/S-840			4000	2x1960						
WTE1000-W/B/S-850			5000	2x1951						
WTE1001-W/B/S-830	2x22	40	3000	2x1770	79%	<19	✓	✓	✓	✓
WTE1001-W/B/S-840			4000	2x1935						
WTE1001-W/B/S-850			5000	2x1871						
WTE1002-W/B/S-830	2x22	55	3000	2x1768	79%	<19	✓	✓	✓	✓
WTE1002-W/B/S-840			4000	2x1930						
WTE1002-W/B/S-850			5000	2x1860						

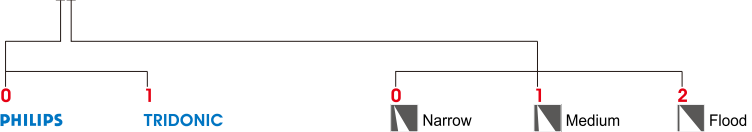

Optical accessories See P.012

PHILIPS SLM C 830 1205 L12 G1 3000K

