

FLEX





We Put Project In Lights

CONTENTS

LED
FLEX SERIES

10



FLS100



FLS110



FLS120



FLS130



FLS140

LED
FLEX Fitting

11



FLC300
100W



FLC310
150W



FLC320
200W



FLC400
3M



FLC410
1.6M



FLC100



FLC200

LED
FLEX COMBO

12



FLR4100



FLR6100



FLR4200



FLR6200





FLR3100




FLP1500



FLF1950

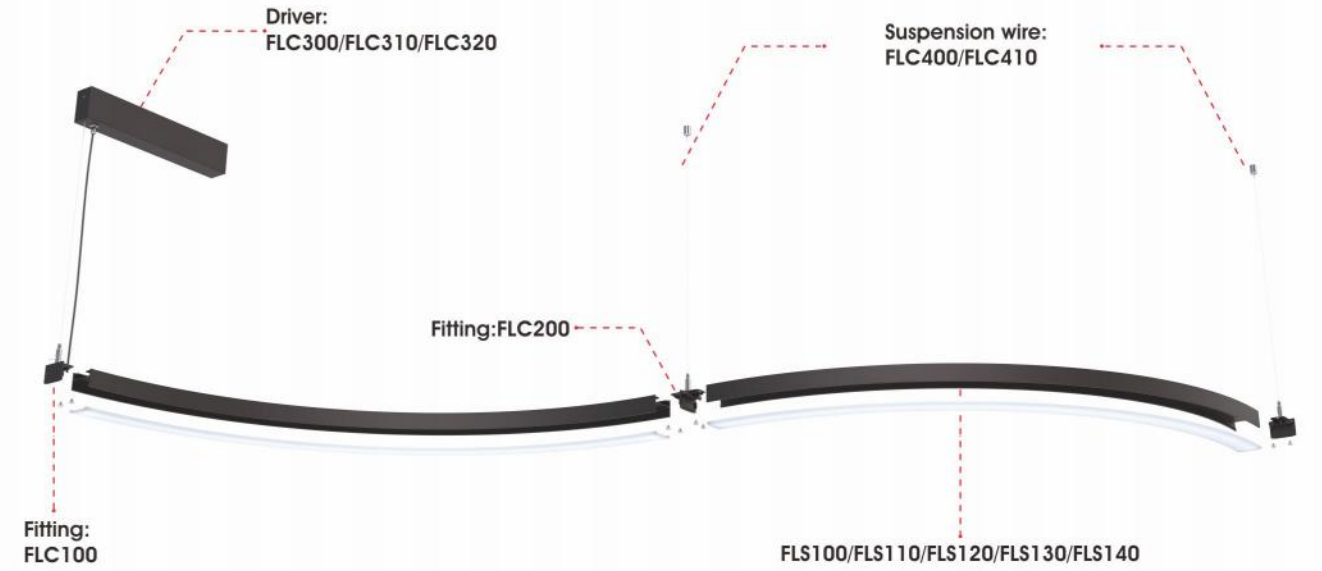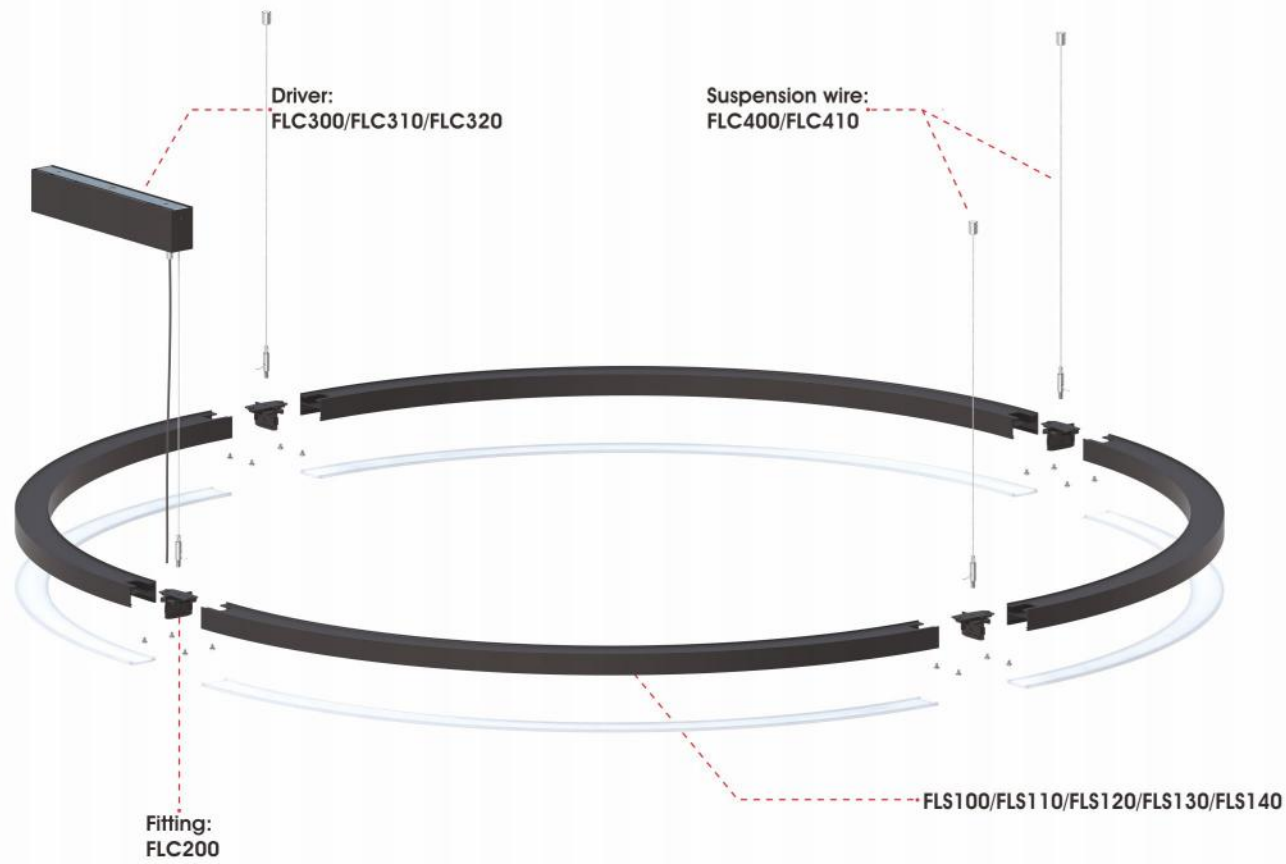

Flex Linear lighting system is an flexible lighting solution for wild range of project applications. Flex enables easy installation for Tailor-made products in a short time without cutting or fiddling with components and Premature engineering headache. Thanks to it's endless joints and prefabricated linear housing body which made it passable to create your own design and sizes. The multiple choice is up to your own imagination.

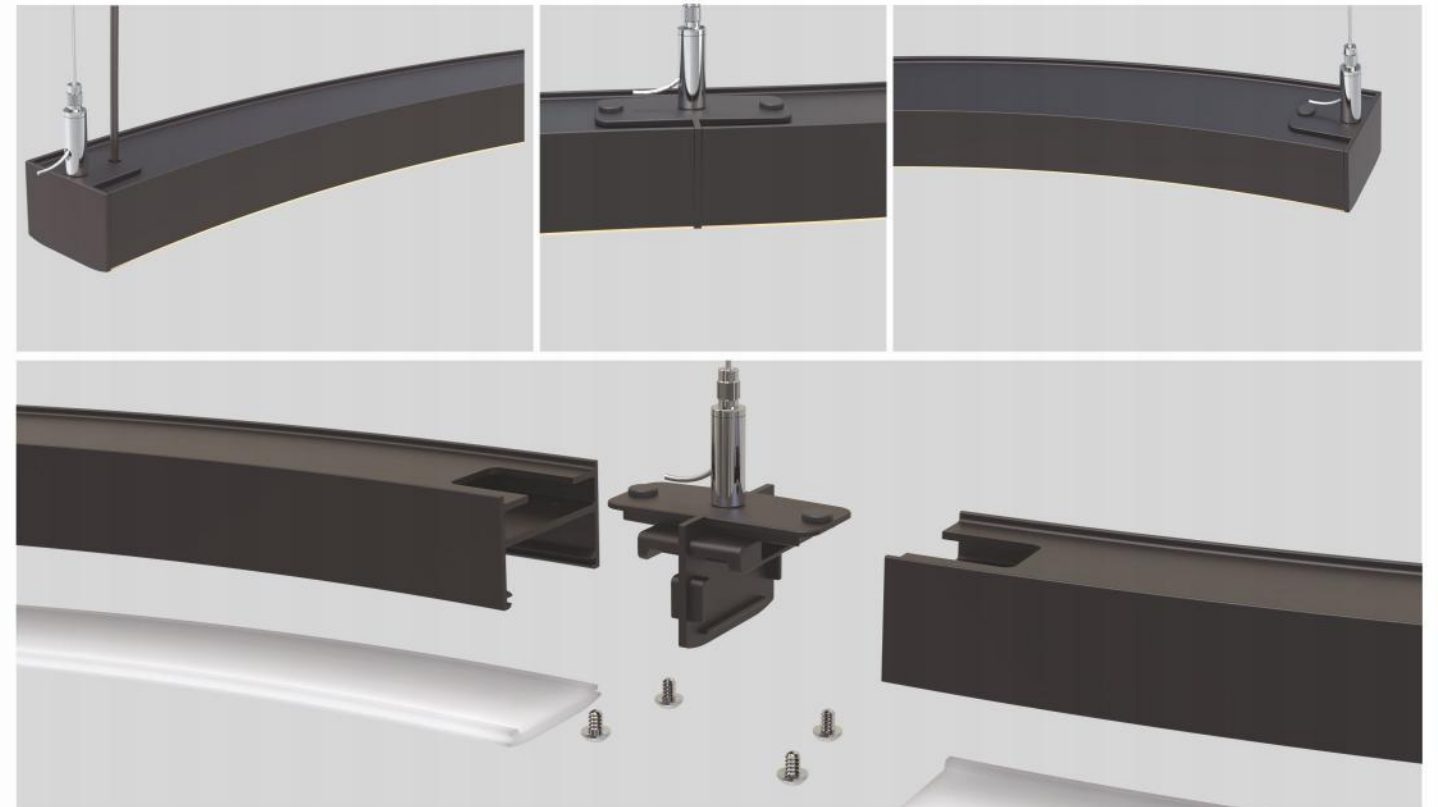




Application



Application

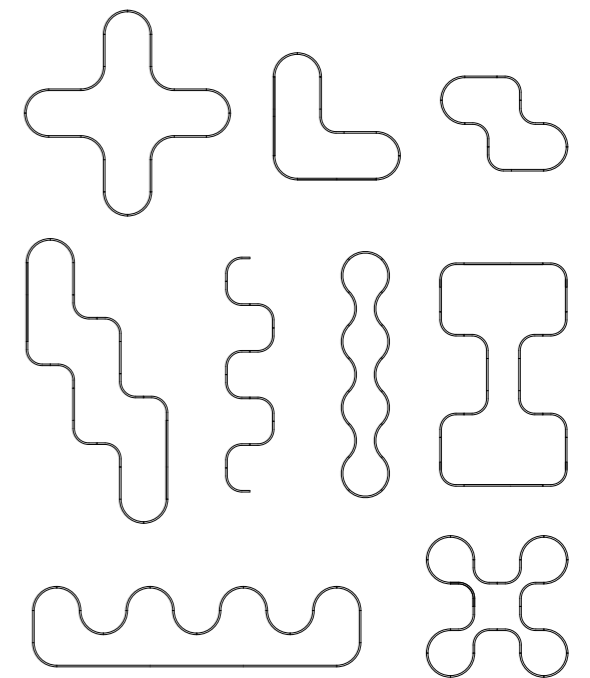


FLEX SERIES
LED PENDANT LAMP



IP20 | CE | CB | | |

Body: aluminium
Housing: aluminium
Optic: Silicon




White
 Black

ORDERING CODE	Power (W)	CCT (K)	Hot Lumen (Lm)	LOR (%)	UGR	Size (MM)	DRIVER			
							On/Off	1-10V	DALI	Triac
FLS100-W/B	20	3000	1490	65%	<19	R750	✓	✓	✓	✓
		4000	1535							



IP20 | CE | CB | | |

Body: aluminium
Housing: aluminium
Optic: Silicon




White
 Black

ORDERING CODE	Power (W)	CCT (K)	Hot Lumen (Lm)	LOR (%)	UGR	Size (MM)	DRIVER			
							On/Off	1-10V	DALI	Triac
FLS110-W/B	22	3000	1535	65%	<19	R500	✓	✓	✓	✓
		4000	1585							



IP20 | CE | CB | | |

Body: aluminium
Housing: aluminium
Optic: Silicon



White
 Black


ORDERING CODE	Power (W)	CCT (K)	Hot Lumen (Lm)	LOR (%)	UGR	Size (MM)	DRIVER			
							On/Off	1-10V	DALI	Triac
FLS120-W/B	24	3000	1840	65%	<19	R350	✓	✓	✓	✓
		4000	1920							

FLEX SERIES
LED PENDANT LAMP



IP20 | CE | CB | | |

Body: aluminium
Housing: aluminium
Optic: Silicon




White
 Black

ORDERING CODE	Power (W)	CCT (K)	Hot Lumen (Lm)	LOR (%)	UGR	Size (MM)	DRIVER			
							On/Off	1-10V	DALI	Triac
FLS130-W/B	18	3000	1320	65%	<19	1000	✓	✓	✓	✓
		4000	1385							



IP20 | CE | CB | | |

Body: aluminium
Housing: aluminium
Optic: Silicon



White
 Black

ORDERING CODE	Power (W)	CCT (K)	Hot Lumen (Lm)	LOR (%)	UGR	Size (MM)	DRIVER			
							On/Off	1-10V	DALI	Triac
FLS140-W/B	22	3000	1750	65%	<19	1225	✓	✓	✓	✓
		4000	1820							



FLC300 (100W)
FLC310 (150W)
FLC320 (200W)

100W/150W/200W
220-240V AC Input
Suspension wire gearbox



FLC400 (3m)
FLC410 (1.6m)

3m/1.6m
Suspension wire



FLC100

Tail cap



FLC200

Fitting cap

FLEX COMBO
LED ROUND PENDANT LAMP




FLEX COMBO
LED ROUND PENDANT LAMP



IP20 | CE | CB | | |

Gearbox: steel
Body: aluminium
Housing: aluminium
Optic: Silicon

White
 Black

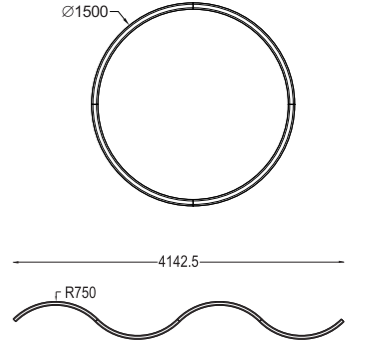

ORDERING CODE	Power (W)	CCT (K)	Hot Lumen (Lm)	LOR (%)	UGR	Size (MM)	DRIVER			
							On/Off	1-10V	DALI	Triac
FLR4100-W/B	80	3000 4000	5960 6140	65%	<19	∅1500	✓	✓	✓	✓



FLEX COMBO
LED SQUARE PENDANT LAMP




FLEX COMBO
LED SQUARE PENDANT LAMP




IP20 | CE | CB | | |

Gearbox: steel
Body: aluminium
Housing: aluminium
Optic: Silicon

White
 Black

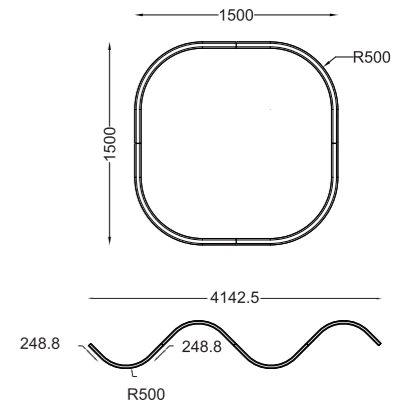

ORDERING CODE	Power (W)	CCT (K)	Hot Lumen (Lm)	LOR (%)	UGR	Size (MM)	DRIVER			
							On/Off	1-10V	DALI	Triac
FLR4200-W/B	88	3000 4000	6140 6340	65%	<19	1500x1500	✓	✓	✓	✓

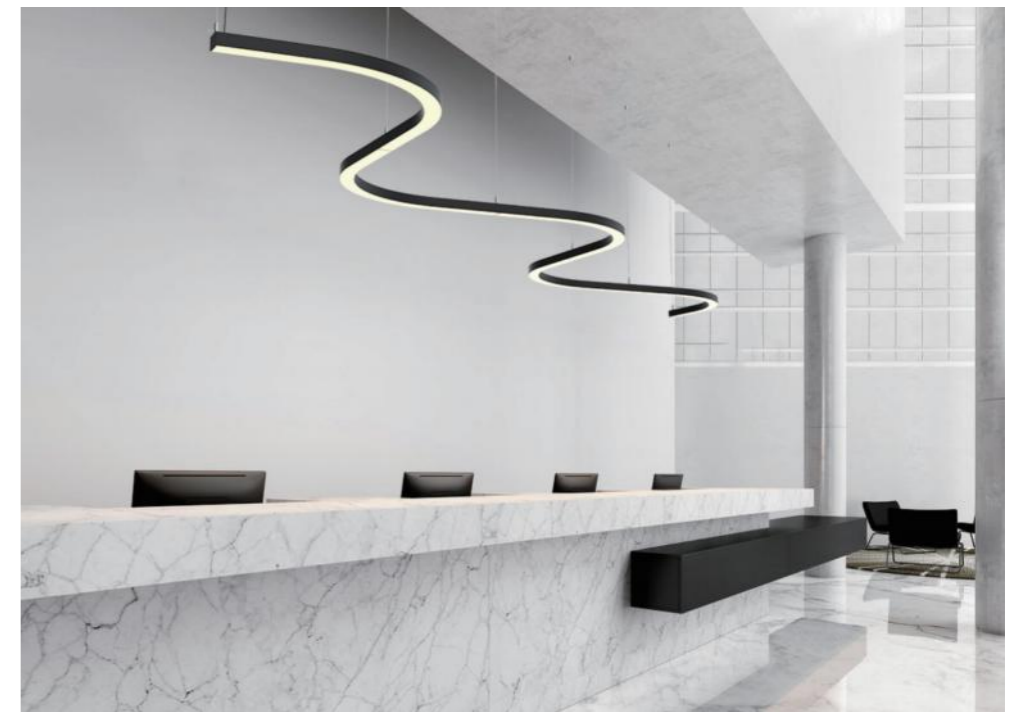



FLEX COMBO
LED FILLET RECTANGLE PENDANT LAMP




FLEX COMBO
LED FILLET RECTANGLE PENDANT LAMP



IP20 | CE | CB | | |

Gearbox: steel
Body: aluminium
Housing: aluminium
Optic: Silicon

White
 Black




ORDERING CODE	Power (W)	CCT (K)	Hot Lumen (Lm)	LOR (%)	UGR	Size (MM)	DRIVER			
							On/Off	1-10V	DALI	Triac
FLR6100-W/B	116	3000 4000	8600 8910	65%	<19	1500x2500	✓	✓	✓	✓



IP20 | CE | CB | | |

Gearbox: steel
Body: aluminium
Housing: aluminium
Optic: Silicon

White
 Black



ORDERING CODE	Power (W)	CCT (K)	Hot Lumen (Lm)	LOR (%)	UGR	Size (MM)	DRIVER			
							On/Off	1-10V	DALI	Triac
FLR6200-W/B	124	3000 4000	8780 9110	65%	<19	1500+2500	✓	✓	✓	✓

FLEX COMBO
LED BOW PENDANT LAMP




FLEX COMBO
LED BOW PENDANT LAMP



IP20 | CE | CB | | |

Gearbox: steel
Body: aluminium
Housing: aluminium
Optic: Silicon



White
 Black



ORDERING CODE	Power (W)	CCT (K)	Hot Lumen (Lm)	LOR (%)	UGR	Size (MM)	DRIVER			
							On/Off	1-10V	DALI	Triac
FLP1500-W/B	40	3000 4000	2780 2860	65%	<19	1500	✓	✓	✓	✓





IP20 | CE | CB | | |

Gearbox: steel
Body: aluminium
Housing: aluminium
Optic: Silicon



White
 Black

ORDERING CODE	Power (W)	CCT (K)	Hot Lumen (Lm)	LOR (%)	UGR	Size (MM)	DRIVER			
							On/Off	1-10V	DALI	Triac
FLR3100-W/B	72	3000 4000	5520 5760	65%	<19	1395+1395	✓	✓	✓	✓



FLEX COMBO
LED FLOOR LAMP




FLEX COMBO
LED FLOOR LAMP




IP20 | CE | CB | | |

Base: steel
Body: aluminium
Housing: aluminium
Optic: Silicon

White
 Black



ORDERING CODE	Power (W)	CCT (K)	Hot Lumen (Lm)	LOR (%)	UGR	Size (MM)	DRIVER			
							On/Off	1-10V	DALI	Triac
FLF1950-W/B	25	3000 4000	1660 1870	65%	<19	1200+1950	✓	✓	✓	✓

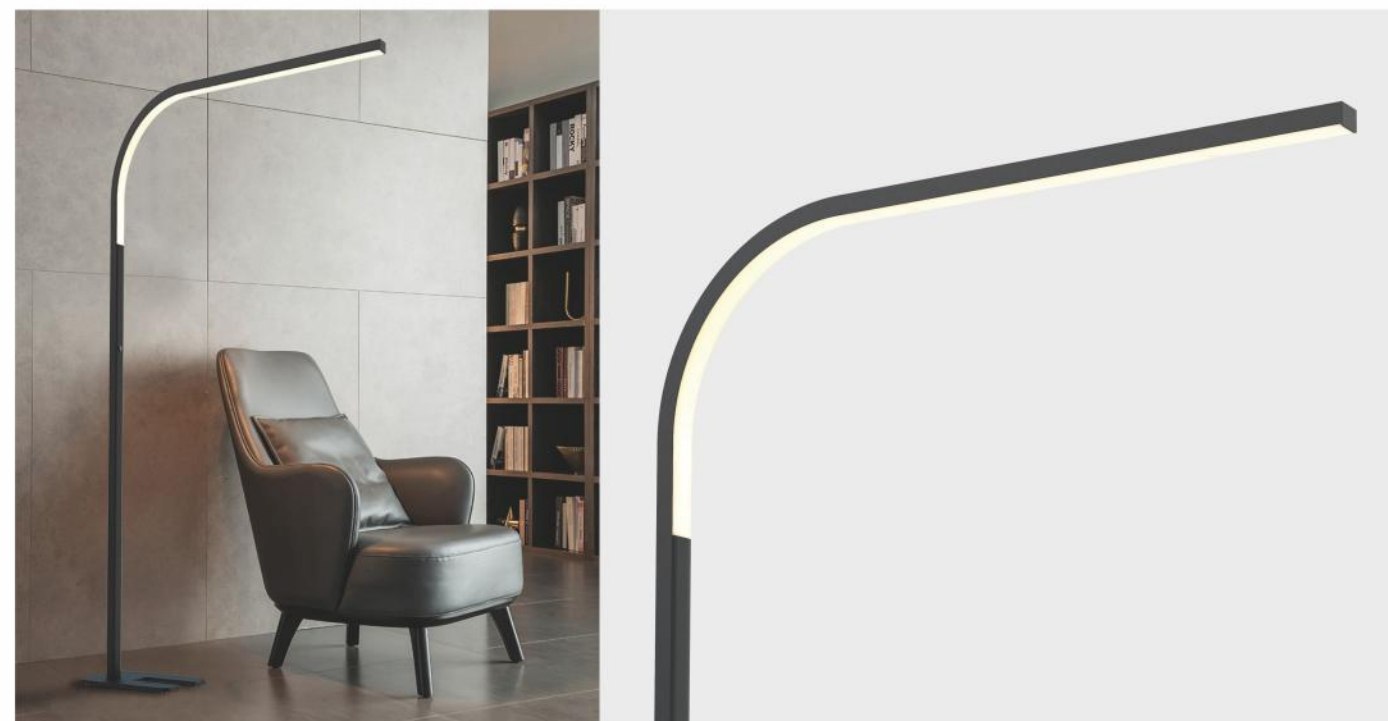



FLEX COMBO
LED FLOOR LAMP
